



PRINTED COPIES OF THIS DOCUMENT ARE FOR "REFERENCE" ONLY. CURRENT REVISIONS ARE AVAILABLE ONLINE.

HEAD MARKING

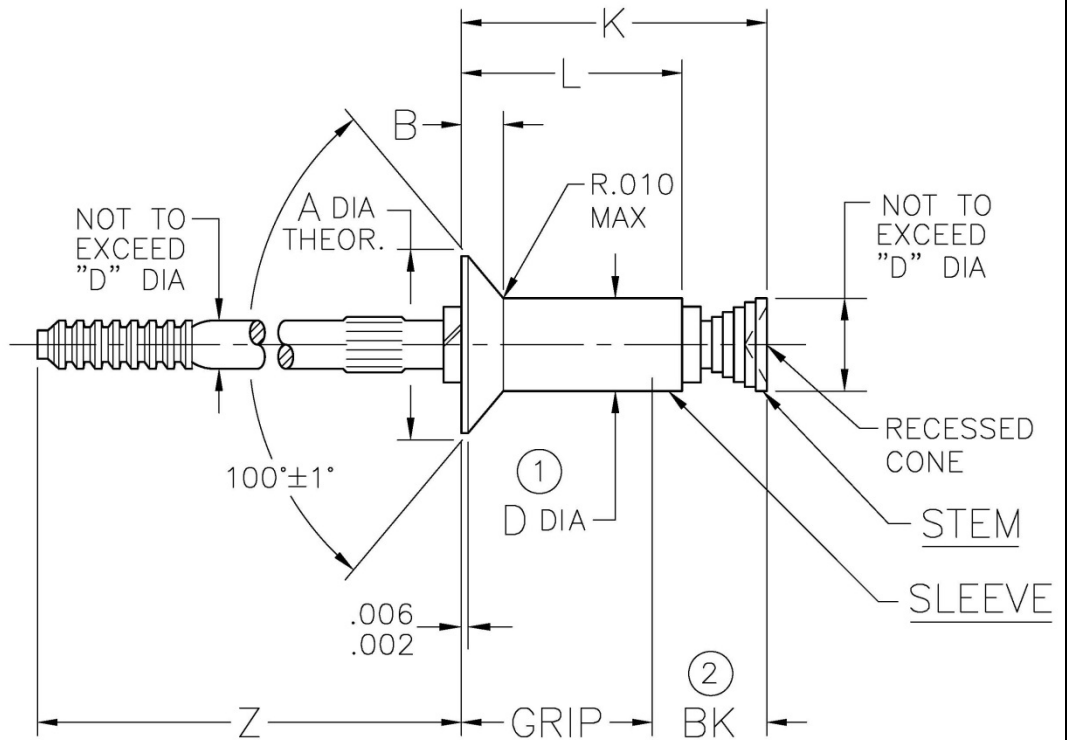
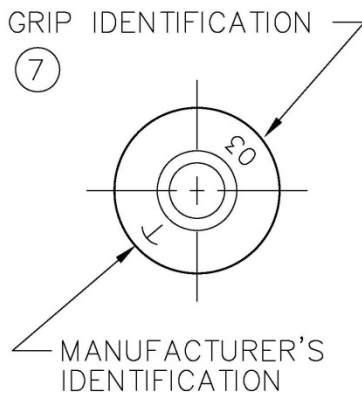


TABLE I

DIA. DASH NO.	A ±.004	B REF	D +.003 -.001	BK MIN	Z REF	HOLE LIMITS	
						MIN	MAX
-4	.225	.035	.140	.30	1.62	.143	.146
-5	.286	.047	.173	.33	1.57	.176	.180
-6	.353	.063	.201	.37	1.59	.205	.209

TABLE II

FINISH CODE	NAS 523 CODE	MATERIAL ③			FINISH		
		SLEEVE	STEM	LOCK RING	SLEEVE	STEM	LOCK RING
---	AAT	5056-F PER QQ-A-430	8740 STEEL PER AMS 6322	MONEL PER QQ-N-281	CHEM. FILM PER MIL-DTL-5541	CAD. PLATE PER QQ-P-416, CL 2, TYPE II	NONE
NS	NICKEL PLATE PER CHERRY SPEC C-5						
PR ⑧	CAD. PLATE PER QQ-P-416, CL 2, TYPE II						

NOTICE: ALL DIMENSIONS ARE IN INCHES AND APPLY AFTER FINISH AND BEFORE LUBRICATION UNLESS OTHERWISE SPECIFIED.

WARNING: FASTENERS MAY NOT PERFORM PROPERLY IF ALTERED FROM THE MANUFACTURER'S AS-SHIPPED CONDITION OR INSTALLED IN CONDITIONS OTHER THAN SPECIFIED HEREIN.

PROCUREMENT SPECIFICATION:  NAS 1740  NAS 523 CODE: SEE TABLE II	<b>CHERRYLOCK® RIVET</b> BULBED 100° FLUSH HEAD		SHEET 1 OF 3		PART NUMBER  <b>CR2248</b>
			ISSUE	07-11-78	
			REV.	U 5-27-15	



**TABLE III**

GRIP DASH NO. ⑦	GRIP RANGE		RIVET GROUP ④	-4 DIA		-5 DIA		-6 DIA	
	MIN	MAX		L MAX	K MAX	L MAX	K MAX	L MAX	K MAX
-01	.045	.062	A	.230	.38	---	---	---	---
-02	⑤	.125		.281	.44	.312	.48	.344	.51
-03	.126	.187		.344	.50	.375	.54	.406	.58
-04	.188	.250		.406	.57	.437	.60	.469	.64
-05	.251	.312		.469	.63	.500	.67	.531	.70
-06	.313	.375		.531	.69	.562	.73	.594	.76
-07	.376	.437		.594	.75	.625	.79	.656	.83
-08	.438	.500		.656	.82	.687	.85	.719	.89
-09	.501	.562		.719	.88	.750	.92	.782	.95
-10	.563	.625		---	---	.812	.98	.844	1.02
-11	.626	.687		---	---	.875	1.04	.907	1.08
-12	.688	.750		---	---	---	---	.970	1.14


**NOTES:**

- ① AN INCREASE OF .001 PERMISSIBLE WITHIN 0.100 OF BASE OF HEAD.
- ② MINIMUM BLIND SIDE CLEARANCE FOR SATISFACTORY INSTALLATION.
- ③ MATERIAL DESIGNATION REFERS TO CHEMICAL COMPOSITION ONLY.
- ④ RIVET GROUP REFERS TO SHIFT-POINT SETTING OF RIVETER.
- ⑤ MINIMUM GRIP FOR -4 DIA IS .063, FOR -5 DIA IS .063 AND FOR -6 DIA IS .073.
- ⑥ THIS PRODUCT MEETS THE REQUIREMENTS OF NAS 1739.
- ⑦ SINGLE DIGIT MARKING IS PERMISSIBLE, AT MANUFACTURER'S OPTION, FOR GRIP DASH (-) NUMBERS LESS THAN 10.
- ⑧ USE "PR" CODE TO ORDER RIVETS DRY OR WITH PAR 90 LUBE IF LUBRICATION IS REQUIRED.

SHEET 2 OF 3			PART NUMBER
ISSUE	07-11-78		CR2248
REV.	U	5-27-15	



EXAMPLE OF CHERRY PART NUMBER:

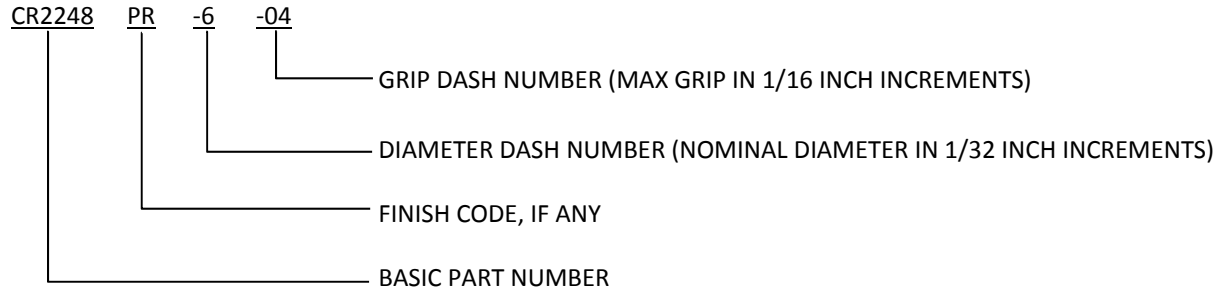

SHEET 3 OF 3		PART NUMBER
ISSUE	07-11-78	CR2248
REV.	U 5-27-15	

**STANDARDS PAGE REVISION LOG      CR2248**

REV LTR	DATE	DCR NUMBER	REVISION DESCRIPTION	COMP. BY
U	5-27-15	14-1284	• GENERAL CLEANUP AND STANDARDIZATION	CL