


NOTICE: This Government drawing, specification, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government hereby incurs no responsibility, nor any obligation whatsoever, and the fact that the Government may have furnished, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any way limiting the liability of any other person or corporation, or conveying any rights or protection to manufacturer, user, or seller any patented invention that may in any way be related thereto.

MS9226(ASG)

FED. SUP CLASS
9525

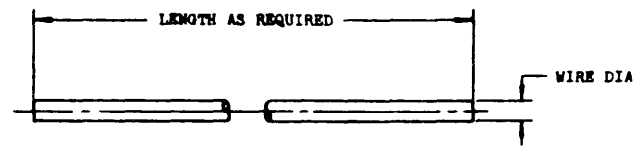

PART NUMBER	(A)	WIRE DIAMETER	FT PER LB APPROX
MS9226-01		.016 ± .001	1422
MS9226-02		.020 ± .001	873
* MS9226-03		.025 ± .001	558
* MS9226-04		.032 ± .002	341
* MS9226-05		.040 ± .002	218
MS9226-06		.051 ± .002	134
MS9226-07		.063 ± .002	88
MS9226-08		.091 ± .002	42

* PREFERRED SIZE

- (A) MATERIAL: CORROSION AND HEAT RESISTANT STEEL AMS 5687
HEAT IN AIR AT 1000°F FOR A TIME SUFFICIENT TO PRODUCE A GRAY COLOR SPECIFICATION REQUIREMENTS SHALL BE MAINTAINED AFTER HEAT
- (A) WHEN LOCKWIRE IS SUPPLIED IN ACCORDANCE WITH THIS DRAWING, THE SPECIFIED DIAMETER TOLERANCES SUPERSEDE THOSE IN THE MATERIAL SPECIFICATION.
- (A) DIMENSIONS IN INCHES.
DO NOT USE UNASSIGNED PART NUMBERS.

APPROVED 21 Jan 58
 REVISED (C) 13 Apr 61

THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE ENGINE AND PROPELLER UTILITY PARTS COMMITTEE OF THE SAE.

CUSTODIAN Navy - Mop P.A. USAF - AFSC	<h2 style="margin: 0;">MILITARY STANDARD</h2>	<h1 style="margin: 0;">MS9226(ASG)</h1>
PROCUREMENT SPECIFICATION NONE	WIRE - STEEL, CORROSION AND HEAT RESISTANT, SAFETY, 1800°F	SHEET 1 OF 1

NO FORM 289
1 NOV 58

11-98 3-8-61 01 25170